

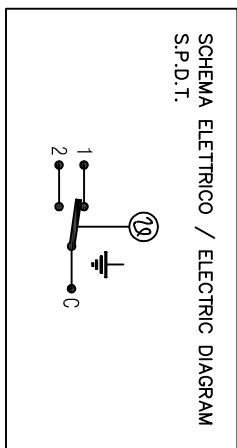


GUAINA PVC / COATED PVC

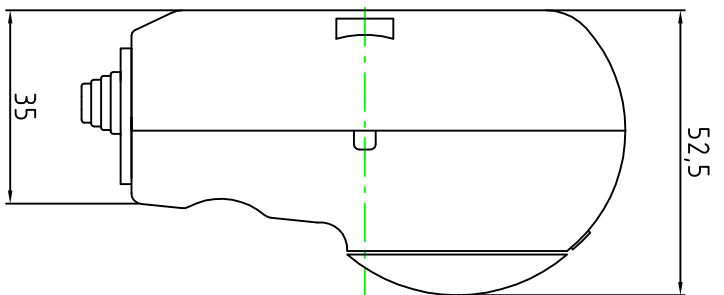

DATI TECNICI - TECHNICAL DATA	
SCALA RANGE:	0 / 40°C
DIFFERENZIALE / DIFFERENTIAL:	4 ± 2°C
TOLL. VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY:	ACCIAIO INOX / INOX STEEL
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL:	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY:	C1 15(2,5)A 400 VAC - C2 2,5(0,4)A 400 VAC
MINIMUM CORRENT:	200 mA
INSULATION RESISTANCE:	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT:	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	80°C
GRADO TENUTA / IP GRADE:	IP 40

ETICHETTA INDELEBILE PER RIFERIMENTO UNICO



MODIFICA	DOC.RIF.	DATA	APPARECCHIO ASSIEME	ARTHERHO
1			PARTICOLARE ARTH095	
2			MATERIALE	
3			TRATTAMENTO	
4			NOTE	
5				

**ARTHERHO**

DESIGNATO A. SALA

SCALA 1:1

APPROVATO SALA A.

DATA 11/11/2011

ARTH095