




DATI TECNICI - TECHNICAL DATA

SCALA RANGE:	0/40°C
DIFFERENZIALE / DIFFERENTIAL :	4 ± 2°C
TOLL.VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY :	MM 1500 ACCIAIO INOX / INOX STEEL
INVOLUCRO MANOPOLA / CASE:	ABS GRIGIO / ABS GREY
SERIGRAFIA :	NUMERI NERI / BLACK NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY :	C1 15 (2,5) A 400VAC / C2 2,5 (0,4) A 400VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE :	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE :	IP54

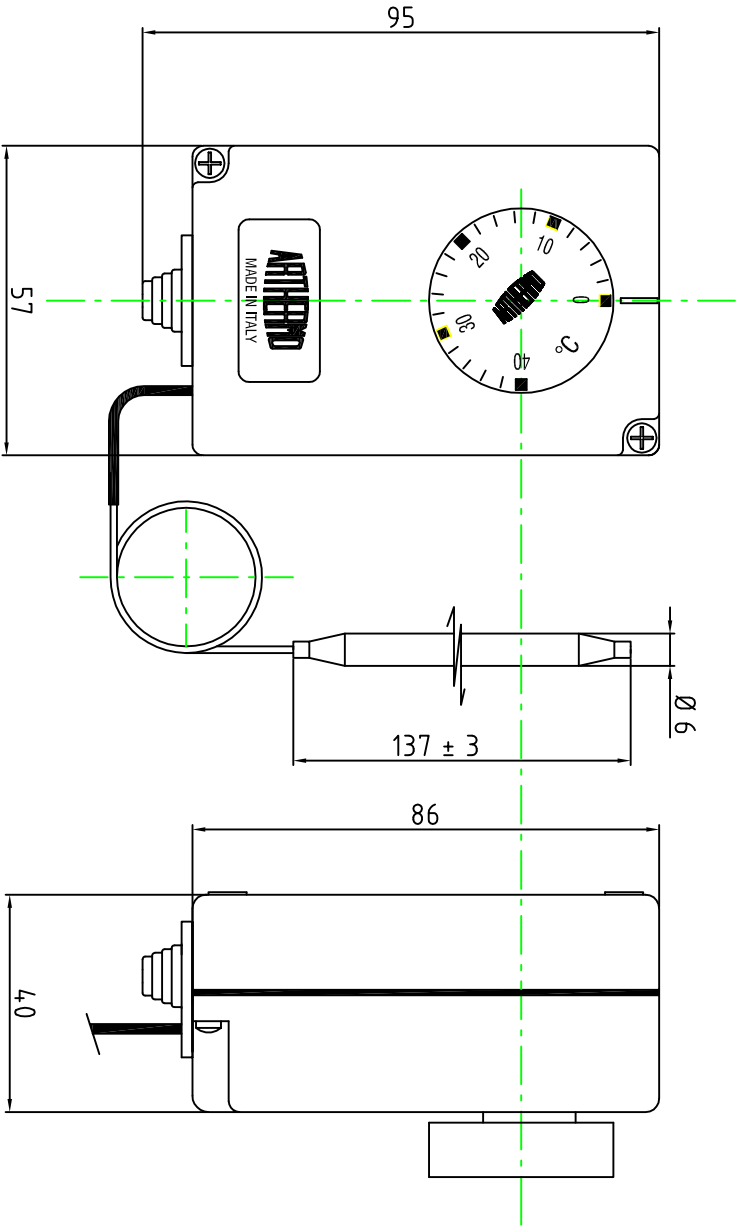

MODIFICA		DOC.RIF.	DATA	APPARECCHIO ASSIEME	
1				PARTICOLARE	TSC-096/IP
2				MATERIALE	
3				TRATTAMENTO	
4				NOTE	
5					

ARTERHO	
DISEGNATO A. SALA	APPROVATO SALA A.
SCALA 1 : 1	DATA 04/12/2017
CODICE TSC-096/IP	