


PVC CAPILLARY MM 1500

INOX STEEL CAPILLARY MM 1500

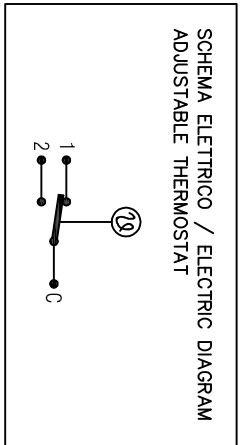

DATI TECNICI - TECHNICAL DATA - ADJUSTABLE THERMOSTAT

SCALA RANGE:	-35+35°C
DIFFERENZIALE / DIFFERENTIAL:	3 ± 2°C
TOLL. VALORI F.S.	± 3°C
CAPILLARY:	INOX STEEL MM 1500
INVOLUCRO MANDOPOLA / CASE:	GREY
SERIGRAFIA / DIAL:	GREY KNOB / BLACK WRITING
PORTATA CONTATTI / BREAKING CAPACITY:	C1 2,5/0,4/A 400VAC / C2 15/2,5/A 400VAC
MINIMUM CORRENT:	200 mA
INSULATION RESISTANCE:	>100 M OHM
TEST DI VITA / LIFE OF PRODUCT:	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE:	IP 40

DATI TECNICI - TECHNICAL DATA - THERMOMETER

SCALA / RANGE:	-40+40°C
QUADRANTE / DIAL:	WHITE DIAL / BLACK NUMBERS - LOGO ARTERMO
RISOLUZIONE / RESOLUTION:	2 °C
TRASPARENTE / TRANSPARENT:	PLASTIC TRANSPARENT
INDICE / POINTER:	BLACK PLASTIC
TARATURA / CALIBRATION:	0 °C ± 1°C
CONTROLLO / CALIBRATION CHECK:	-20 °C ± 2°C
CORPO / CASE:	BLACK PLASTIC
CORNICE / FRAME:	/

MODIFICA

MODIFICA	DOC/RIF	DATA	APPARECCHIO ASSIEME PARTICOLARE	MATERIALE	TRATTAMENTO	DISEGNATO A. SALA	APPROVATO SALA A.
1			MULTI 402			SCALA 1:1	DATA 23/03/2015
2							
3							
4							
5							



MULTI 404